

PS1X Price Scale Series

Patent product , counterfeiting not allowed

Membrane Key Patent No.: ZL 01 2 03361.8

Insert-proof Patent No.: ZL 03 2 26288.4

patent number of Vibration trigger design: ZL 2009 2 0177204.7

price computing scale/
communication price computing scale

MODEL EXPLICATION

PS1xxXXX

- | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> 15:6kg/15kg 30:15kg/30kg | <ul style="list-style-type: none"> platter types G: glass platter S: stainless steel platter |
| <ul style="list-style-type: none"> A:3pcs AA dry batteries B:3pcs D dry batteries, with backlight C:Communication type, with backlight & RS232, rechargeable D:Communication type with 35*2 hotkeys, backlight & RS232, rechargeable | <ul style="list-style-type: none"> battery models of communication type P: lead acid battery D: dry battery L: lithium battery |



PS1XA/B/CXG



PS1XDXG



with insect-proof loop design (patent)



With display pole mode (Customized)



Customer display



Stainless steel platter optional

Unique functions

- Multi customers accumulating function (patent) with five accumulating keys, able to accumulate for five customers at the same time, whereas traditional electronic scales just accumulate for one customer.
- Insect-proof design (patent), able to prevent the defect caused by bugs entering into the machine.
- Unique super lower power consumption design, only 3 AA(LR6) (PS1XA) can drive the scale more than one year(8 hours each day, 20 times each hour, 5 seconds each time); 3 D (R20P)(PS1XB) last more than half a year (8 hours each day, 20 times each hour, 5 seconds each time).
- Patent shaking detected circuit design, most of the time in super power saving stand-by status(30μA) , will enter into working status by any loading(24mA).
- Price unit (500g) or kilogram (kg.) can be set, suitable to traditional market.
- Patent hot keypad (PS1XD with 35*2 PLU keyboard), not only can be printed to put PLU sheet underneath, but also can be used as unit price default keys.
- The most feature-rich "MR" key, able to redisplay the transaction process which including unit price、piece weight、total price、price unit and serial number, more clearer than other scales in market.
- Patent tempered glass platter, practical and good looking. (Stainless steel platter optional).
- Super 3-line LCD display, able to display weight, unit price and total price in the same screen.
- Well-designed combined function keys, convenience and easy to operate.

Excellent functions


- 9 memory unit price, convenient to operate when busy.
- PS1XC/PS1XD with communication port, able to connect with POS or ECR. Optional RS232 dongle to realize wireless communication.
- Auto-power saving design, will enter into the stand-by status automatically without any operation (user-defined 4~200 seconds at will, 200 seconds won't enter into auto-power saving status) only consuming 30μA., able to be awake by any loading or operation due to the inner shaking mechanism.(Please tap the platter when there is no response in loading).
- Support backlight (PS1XB/PS1XC/PS1XD) shift function by pressing the backlight key for 3 seconds, able to save electric power by turning off backlight in bright area and extend service life of dry battery.
- CHG function, assist users to change notes accuracy.
- Store 100PLU(PS1XD).
- Support price-lock function, suitable to sell weighing commodity of same price.
- Two optional ranges: 15kg (e=2g/5g) or 30kg (e=5g/10g).

Specifications

Model	PS1XA	PS1XB	PS1XC	PS1XD
Basic features	without backlight	with backlight(Can be turned off)	with backlight & RS232	with 35*2 hotkeys, backlight & RS232
Inner resolution	1/30000			
Weight range	0-15-30Kg			
power	3pcs AA dry batteries	3pcs D dry batteries	530mAh Li battery(4V 2Ah lead acid battery optional)	
Battery Life	approximately one year (8 hours each day, 20 times each hour, 5 seconds each time)	approximately half year (8 hours each day, 20 times each hour, 5 seconds each time)	approximately one month(approximately 3 months)	
Power consumption	soft turning off < 5 μ A ,stand by: 30 μ A ,Working :4mA; backlight on :<20mA			
Working temperature	0℃~40℃			
Working humidity	5%~85%R.H.			
Over loading warning	Over 100.015%			
Over loading protection	Over 120%			
Weight	Net weight: 2kg ; gross weight: 3.5kg			
Platter size	glass platter: 327.4*227.4mm; Stainless steel platter: 330*230mm			

Note : Functions and appearance are subject to change without notice. Please refer to practicality.

Dimensions

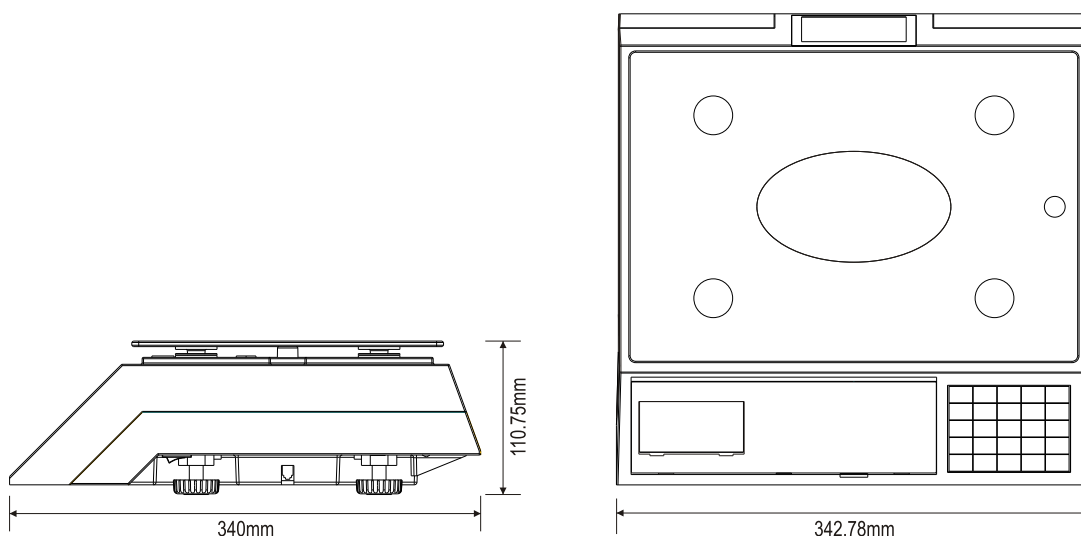

Wireless communication scale

